



OF-550



Fiber Opening Machine



PRODUCT PROCESSED

Polyester fiber and microfiber, virgin and recycled, hollow, conjugated, dry, siliconized



DENIER & STAPLE LENGTH

Denier: 0.8D to 20D
Staple length: 18 mm to 64 mm







OPENING RATE

Up to 100%

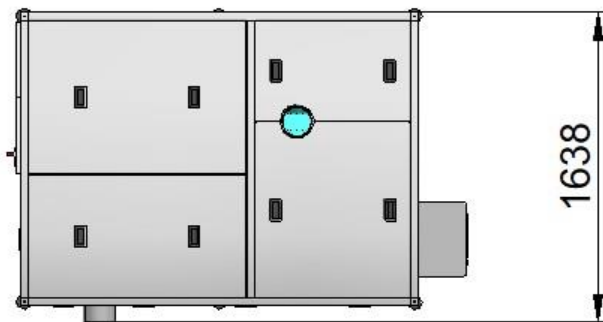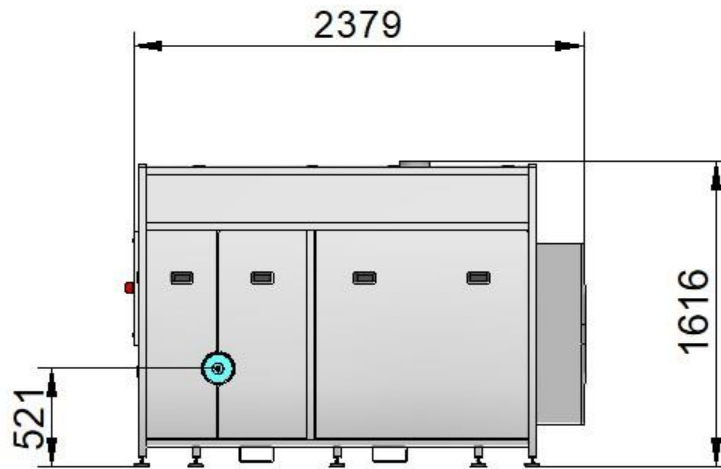

OF-550



	W (mm/ft)	1638 / 5.4		V	400 / 480
	L (mm/ft)	2379 / 7.8		Hz	50 / 60
	H (mm/ft)	1616 / 5.3		Phases	3Ph + G
COMMODITY CODE			84451100		
CE CONFORMITY			2006/42/CE, 2004/108/CE, 2006/95/CE and modifications		

To learn more about our raw material processing solutions, click [here](#)

For machine configuration, performances and prices contact us:
sales@brighigroup.com